

# HD 75


Tandem roller with two vibrating roller drums  
Tandem rollers Series HD / Series H187



## HIGHLIGHTS HD

- > 3-point articulation for even weight distribution and excellent on-centre feel
- > Simple, intuitive and language-neutral operation
- > Ergonomic driver platform with rotatable seat operating unit and adjustable driver's seat
- > Excellent view of the machine and the construction site
- > Track offset for comfortable start up, moving away and compacting at curb edges

Machine dimensions		
Total length (L)	mm	4340
Width (B)	mm	1790
Total height (H)	mm	2940
Drum width (X)	mm	1680/1680
Height loading, min. (Hl)	mm	2260

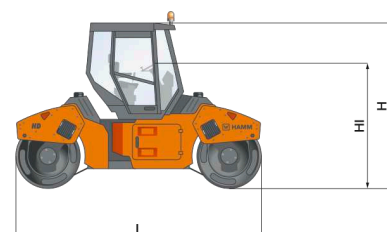

TECHNICAL DATA		Unit	HD 75
	<b>Weights</b>		
	Operating weight with cab	kg	7670
	Operating weight with ROPS	kg	7405
	Operating weight, max.	kg	10110
	Static linear load, front/rear	kg/cm	23,1/22,6
	French classific., data/class		17,4/VT0
	<b>Machine dimensions</b>		
	Total length	mm	4340
	Total height with cab	mm	2940
	Height loading, min.	mm	2260
	Wheel base	mm	3200
	Total width with cab	mm	1790
	Max. working width	mm	1780
	Kerb clearance, left/right	mm	780/780
	Turning radius, inside	mm	4084
	<b>Drum dimensions</b>		
	Drum width, front/rear	mm	1680/1680
	Drum diameter, front/rear	mm	1140/1140
	Drum thickness, front/rear	mm	17/17
	Drum type, front		Smooth/non-split
	Drum type, rear		Smooth/non-split
	Track offset, left/right	mm	100
	<b>Diesel engine</b>		
	Manufacturer		DEUTZ
	Version		TD 2011 L04 W
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		55,4/75,3/2500
	Power rating SAE J1349, kW/HP/rpm		55,4/74,2/2500
	Emission standard		EU Stage IIIA / EPA Tier 4i
	<b>Drive</b>		
	Speed, working gear	km/h	0-6,3
	Speed, transportation gear	km/h	0-12,6
	Climbing ability, vibration on/off	%	30/40
	<b>Vibration</b>		
	Vibration frequency, front, I/II	Hz	48/58
	Vibration frequency, rear, I/II	Hz	48/58
	Amplitude, front, I/II	mm	0,61/0,33
	Amplitude, rear, I/II	mm	0,61/0,33
	Centrifugal force, front, I/II	kN	77/63
	Centrifugal force, rear, I/II	kN	77/63
	<b>Steering</b>		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	<b>Sprinkler system</b>		
	Water sprinkler, type		Pressure
	<b>Tank capacity/Fill capacity</b>		
	Fuel tank, capacity	L	140
	Water tank, capacity	L	720
	<b>Sound level</b>		
	Acoustic power LW(A), sticker		106
	Acoustic power LW(A), measured		106

#### EQUIPMENT

2 drive levers, Amplitude switchable: large/small, Handrails, Lighting package as per road traffic regulations, Operator's platform with entry from both sides, Speedometer, Seat-operating unit, rotatable, Seat-operating unit, rotatable, with armrests and safety belt, Vibration front and rear, switchable single and doubled, Handrails on the operator's platform

#### OPTIONAL EQUIPMENT

ROPS cabin, ROPS, rigid, Heating, Air conditioning, Protective roof, Edge pressing and cutting equipment, Frequency control, Speedometer, Engine rpm counter, HAMM Temperature Meter (HTM), Track offset display, Back-up alarm (reversing), Telematics interface, Automatic vibration system, Working lights, Rotating beacon, Water tank cover, lockable

#### HAMM AG

Hammstraße 1  
D-95643 Tirschenreuth  
Tel +49 9631 80-0  
Fax +49 9631 80-111  
www.hamm.eu



# HAMM